

Geo-Fix[®]

Paving Jointing Compound

- Simply brush into joints and compact
- Ready to use – no mixing
- Cement free
- Sets hard, won't crack or wash out
- Resists weed and plant growth
- Totally weatherproof – unaffected by frost
- For all joints of 5mm wide and over
- Water permeable, allows water escape

Coverage Calculator

Joint width	Paving Dimension To Be Jointed (with a joint depth of 25mm)		
	250mm x 250mm	450mm x 450mm	600mm x 600mm
5mm	13.0m ²	22.0m ²	26.5m ²
6mm	11.0m ²	19.0m ²	22.0m ²
7mm	9.0m ²	16.5m ²	17.5m ²
8mm	7.8m ²	14.5m ²	16.5m ²
9mm	6.5m ²	12.0m ²	14.5m ²
10mm	5.8m ²	11.0m ²	13.0m ²

The above figures show the coverage for a 20kg pack being used.



Geo-Fix[®]

Paving Jointing Compound

Geo-Fix[®]

Stone Protector



A SIKA COMPANY

Everbuild Building Products Ltd - A Sika Company

Site 41, Knowsthorpe Way,
Cross Green Industrial Estate, Leeds LS9 0SW

Telephone: 0113 240 3456

Fax: 0113 240 0024

Email: everbuild.info@uk.sika.com

Websites: www.everbuild.co.uk

www.geo-fix.co.uk

Sika Ireland Limited

Sika House
Ballymun Industrial Estate, Dublin 11, Ireland

Tel: 01 862 0709

Fax: 01 862 0707

Email: info@everbuild.eu

Website: www.everbuild.eu

Our most current General Sales Terms & Conditions shall apply.
Please consult the most current Product Data Sheet prior to any use.

Rev:1

Geo-Fix[®]

Joints, Seals and Protects for the Ultimate Finish

USE ON NATURAL STONE, PAVING, FLAG, SLABS, COBBLES & STONE SETTS



Geo-Fix[®]

Paving Jointing Compound



Easier & Faster

Geo-Fix Paving Jointing Compound is ready mixed and can simply be brushed into joints with minimal effort compared to using traditional mortar.

Geo-Fix Paving Jointing Compound is easily finished by compacting with a pointing tool saving valuable time compared to traditional wet pointing.

Geo-Fix Paving Jointing Compound offers huge time saving benefits compared to applying traditional mortar.

Better

Because Geo-Fix Paving Jointing Compound is cement free and applied dry it does not leave the unsightly and difficult to remove cement stains associated with traditional mortar.

Unlike mortar joints Geo-Fix Paving Jointing Compound is totally resistant to freeze-thaw cycles and will not crack or pop out with frost.

Geo-Fix Paving Jointing Compound forms a solid joint that resists weed and plant growth yet is water permeable, allowing water to escape to prevent ponding.

Available in Buff and Grey colours


✓ NO CEMENT ✓ NO WATER ✓ NO MESS

BEWARE OF IMITATIONS
Geo-Fix is the original and best
Jointing Compound
ACCEPT NO SUBSTITUTE

How to use Geo-Fix[®]



Step 1
Lay the paving onto the base in accordance with the paving manufacturers instructions. Allow a minimum joint width of 5-6mm and a depth of at least 25mm.

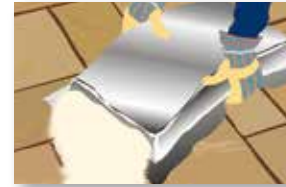

Step 2
Carefully open the vacuum-packed bag and sprinkle Geo-Fix Paving Jointing Compound over the area to be joined. Work in small areas of approx 2-3 square metres at a time. Once open the entire bag must be used within 45 minutes.



Step 3
Using a soft brush, push the Geo-Fix Paving Jointing Compound into the joints at a 45° angle.



Step 4
Firmly compact Geo-Fix Paving Jointing Compound with a pointing tool, refill and repeat ensuring a fully compacted & topped joint. Firm compaction is the key to the successful laying of Geo-Fix Paving Jointing Compound. Ensure Geo-Fix Paving Jointing Compound is finished slightly below the surface.



Step 5
After application, brush off excess with a soft brush, taking care not to brush out any Geo-Fix Paving Jointing Compound from the treated area. Geo-Fix Paving Jointing Compound will harden over a 2-3 hour period.



Step 6
On natural stone and paving apply Geo-Fix Stone Protector to provide protection against water, oil and petrol. Please note: allow Geo-Fix Paving Jointing Compound to dry for a minimum of 1 week before application of Geo-Fix Stone Protector.


Geo-Fix[®]

Stone Protector




Invisible Sealer For Natural Stone & Paving

Geo-Fix Stone Protector has an advanced fluoro-resin formula that has been specifically designed to provide long lasting protection on all natural stone from most liquids including water, oil and petrol.

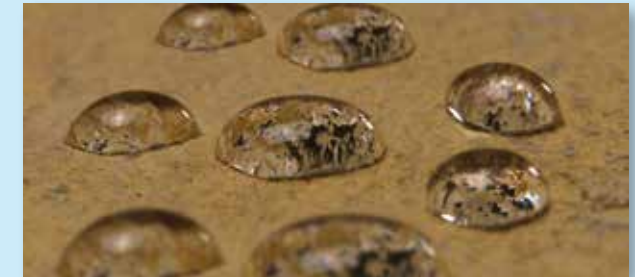

Protects

On untreated stone liquids are absorbed easily into the surface causing staining and water erosion, however once the surface has been treated with Geo-Fix Stone Protector it has long term protection from liquids. The protection is visibly noticeable as liquid forms globules on the surface of the stone.

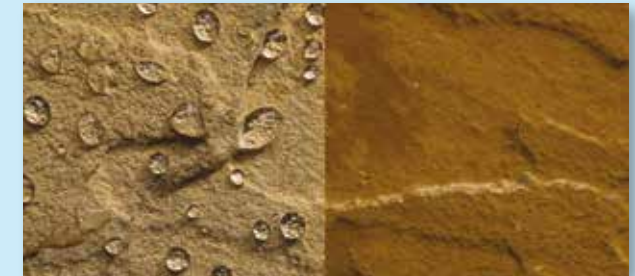

Preserves

Geo-Fix Stone Protector is ideal for protecting the "investment" of natural stone, as it not only provides protection from liquids, but it will not change the natural colour or appearance of the stone.

Geo-Fix Stone Protector can be used internally and externally on all natural stone, including Yorkshire and Indian Sandstones as well as masonry, cementations substrates, marble, terracotta, slate, fireplace surrounds and hearths, floor tiles etc.

PROTECTS & PRESERVES NATURAL STONE